



MIKASA ACCESSORIES




ACCESSORIES

THE FINAL TOUCH TO YOUR
MIKASA FLOOR.

No floor is complete without
matching accessories. These
cover the edge or the transit
between other floors. Mikasa
presents an array of matching
underlays, skirting, and profiles
to complement your floor.

BEADING



Beading of solid wood is available in a variety of colours to suit your floor. They are suitable for every Mikasa floor of varying thickness. They are used when removing an existing skirting is not possible or if you do not want a very high skirting.


TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT	
Product Type			Solid Wood Beading
Wood Species			Oak or steam beech
Product Size			
Thickness		mm	17
Width		mm	17
Length		mm	1800/2100/2400
Moisture Content	EN 322	%	10% - 12%
Lacquer Type			Water Based Acrylic Lacquer and Stains
Lacquer Brand			Plantag, Germany
Lacquer Performance			
Cross Hatch & Removal	EN ISO 2409		0 - 1
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%
Stain Resistance	EN 438 - 2.26		5
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500
Scratch Resistance	EN438 - 2.25		Rating 2
Pencil Hardness	ASTM 3363		SH - H, GH- 5H
Impact Resistance	EN438 - 2.20		5N
Hamberger Plane	TC_01		15 N
Material Safety Data			
VOC Contain			Non-VOC Contain
PCP (pentachlorophenol)			PCP Free
Slip Test			NA
Fire Reaction			NA
Cigarette Burning			NA
Packaging information			
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximum 10 pieces
CartonBox			6 sided single face corrugated carton
Packs Cover			Plastic strap and PPE shrink film
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price

QUADRANT




Quadrant of solid wood is available in a variety of colours to suit your floor. They are suitable for every Mikasa floor of varying thickness. They are used when removing an existing skirting is not possible or if you do not want a very high skirting.




TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT	
Product Type			Solid wood beading
Wood Species			Oak or steam beech
Product Size			
Thickness		mm	17
Width		mm	17
Length		mm	1800/2100/2400
Moisture Content	EN 322	%	10% - 12%
Lacquer Type			Water Based Acrylic Lacquer and Stains
Lacquer Brand			Plantag, Germany
Lacquer Performance			
Cross Hatch & Removal	EN ISO 2409		0 - 1
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%
Stain Resistance	EN 438 - 2.26		5
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500
Scratch Resistance	EN438 - 2.25		Rating 2
Pencil Hardness	ASTM 3363		SH - H, GH- 5H
Impact Resistance	EN438 - 2.20		5N
Hamberger Plane	TC_01		15 N
Material Safety Data			
VOC Contain			Non-VOC Contain
PCP (pentachlorophenol)			PCP Free
Slip Test			NA
Fire Reaction			NA
Cigarette Burning			NA
Packaging information			
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximum 10 pieces
Carton Box			6 sided single face corrugated carton
Packs Cover			Plastic strap and PPE shrink film
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price

SKIRTING

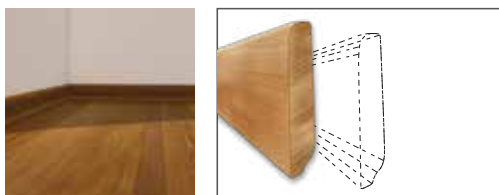

Skirting adds the final touch to your Mikasa floors.
These complement every Mikasa floor of varying thickness.





TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT	
Product Type			Solid Wood Skirting
Wood Species			Oak or steam beech
Product Size			
Thickness		mm	15
Width		mm	70
Length		mm	1800/2100/2400
Moisture Content	EN 322	%	10% - 12%
Lacquer Type			Water Based Acrylic Lacquer
Lacquer Brand			Plantag, Germany
Lacquer Performance			
Cross Hatch & Removal	EN ISO 2409		0 - 1
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%
Stain Resistance	EN 438 - 2.26		5
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500
Scratch Resistance	EN438 - 2.25		Rating 2
Pencil Hardness	ASTM 3363		SH - H, GH- 5H
Impact Resistance	EN438 - 2.20		5N
Hamberger Plane	TC_01		15 N
Material Safety Data			
VOC Contain			Non-VOC Contain
PCP (pentachlorophenol)			PCP Free
Slip Test			NA
Fire Reaction			NA
Cigarette Burning			NA
Packaging information			
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximum 10 pieces
Carton Box			6 sided single face corrugated carton
Packs Cover			Plastic strap and PPE shrink film
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price

REDUCER MOULDINGS




Reducer Mouldings are used to make a smooth transition between floors of differing heights, for example, where wooden floors meet other flooring materials such as stone floors or fitted carpets.

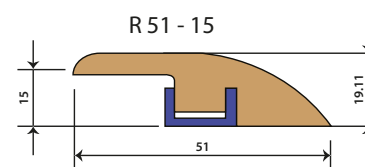



TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT		
Product Type			Solid Wood T-Profile	
Wood Species			Oak or steam beech	
Profile Holder			Plastic Rail/Guide	
Product Size				
Product type			R48-10	R51-15
Thickness		mm	10	15
Width		mm	48	51
Length		mm	1800/2100/2400	
Moisture Content	EN 322	%	10% - 12%	
Lacquer Type			Water Based Acrylic Lacquer and Stains	
Lacquer Brand			Plantag, Germany	
Lacquer Performance				
Cross Hatch & Removal	EN ISO 2409		0 - 1	
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%	
Stain Resistance	EN 438 - 2.26		5	
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500	
Scratch Resistance	EN438 - 2.25		Rating 2	
Pencil Hardness	ASTM 3363		SH - H, GH- 5H	
Impact Resistance	EN438 - 2.20		5N	
Hamberger Plane	TC_01		15 N	
Material Safety Data				
VOC Contain			Non-VOC Contain	
PCP (pentachlorophenol)			PCP Free	
Slip Test			NA	
Fire Reaction			NA	
Cigarette Burning			NA	
Packaging information				
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximum 10 pieces	
Carton Box			6 sided single face corrugated carton	
Packs Cover			Plastic strap and PPE shrink film	
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price	

T - MOULDINGS

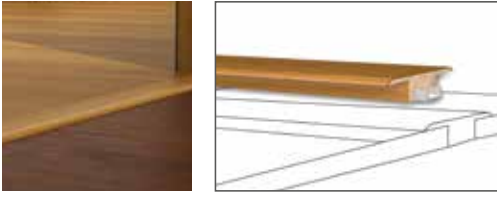

A type of moulding used in the transition between floors of the same height, where two rooms with identical flooring meet at a doorway. For example, hallways or bedrooms.

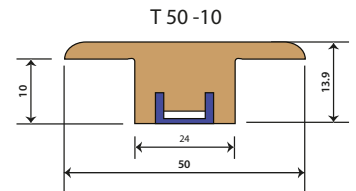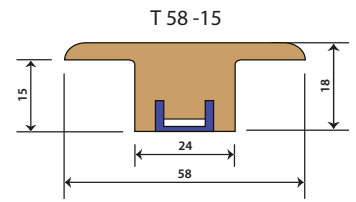



TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT		
Product Type			Solid Wood T-Profile	
Wood Species			Oak or steam beech	
Profile Holder			Plastic Rail/Guide	
Product Size				
Product Type			T50 -10	T58 -15
Thickness		mm	10	15
Width		mm	50	58
Length		mm	1800/2100/2400	
Moisture Content	EN 322	%	10% - 12%	
Lacquer Type			Water Based Acrylic Lacquer and Stains	
Lacquer Brand			Plantag, Germany	
Lacquer Performance				
Cross Hatch & Removal	EN ISO 2409		0 - 1	
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%	
Stain Resistance	EN 438 - 2.26		5	
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500	
Scratch Resistance	EN438 - 2.25		Rating 2	
Pencil Hardness	ASTM 3363		SH - H, GH- 5H	
Impact Resistance	EN438 - 2.20		5N	
Hamberger Plane	TC_01		15 N	
Material Safety Data				
VOC Contain			Non-VOC Contain	
PCP (pentachlorophenol)			PCP Free	
Slip Test			NA	
Fire Reaction			NA	
Cigarette Burning			NA	
Packaging information				
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximum 10 pieces	
Carton Box			6 sided single face corrugated carton	
Packs Cover			Plastic strap and PPE shrink film	
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price	

END MOULDINGS





Most useful when your floor meets an immovable object such as a door casing. It can also be used to cover the gap between the wooden floor and the wall or the window.



TECHNICAL INFORMATION

SPECIFICATIONS	STANDARD	UNIT		
Product Type			Solid Wood End Profile	
Wood Species			Oak or steam beech	
Profile Holder			Plastic Rail/Guide	
Product Size				
Product Type			E38-15	E38 -10
Thickness		mm	15	10
Width		mm	38	38
Length		mm	1800/2100/2400	
Moisture Content	EN 322	%	10% - 12%	
Lacquer Type			Water Based Acrylic Lacquer and Stains	
Lacquer Brand			Plantag, Germany	
Lacquer Performance				
Cross Hatch & Removal	EN ISO 2409		0 - 1	
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%	
Stain Resistance	EN 438 - 2.26		5	
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500	
Scratch Resistance	EN438 - 2.25		Rating 2	
Pencil Hardness	ASTM 3363		SH - H, GH- 5H	
Impact Resistance	EN438 - 2.20		5N	
Hamberger Plane	TC_01		15 N	
Material Safety Data				
VOC Contain			Non-VOC Contain	
PCP (pentachlorophenol)			PCP Free	
Slip Test			NA	
Fire Reaction			NA	
Cigarette Burning			NA	
Packaging information				
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximum 10 pieces	
Carton Box			6 sided single face corrugated carton	
Packs Cover			Plastic strap and PPE shrink film	
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price	

STAIR NOSES



Used when your floor reaches a step down, creating a perfect end to every step in the staircase.

TECHNICAL INFORMATION


SPECIFICATIONS	STANDARD	UNIT	
Product Type			Solid Wood End Profile
Wood Species			Oak or steam beech
Profile Holder			Plastic Rail/Guide
Product Size			
Product Type			E38-15
Thickness		mm	15
Width		mm	38
Length		mm	1800/2100/2400
Moisture Content	EN 322	%	10% - 12%
Lacquer Type			Water Based Acrylic Lacquer and Stains
Lacquer Brand			Plantag, Germany
Lacquer Performance			
Cross Hatch & Removal	EN ISO 2409		0 - 1
Gloss 60°	ASTM D523		Matt - 10% , Satin - 30%
Stain Resistance	EN 438 - 2.26		5
Abrasion Resistance	ASTM D4060 S33		IP - > 1,500
Scratch Resistance	EN438 - 2.25		Rating 2
Pencil Hardness	ASTM 3363		SH - H, GH- 5H
Impact Resistance	EN438 - 2.20		5N
Hamberger Plane	TC_01		15 N
Material Safety Data			
VOC Contain			Non-VOC contain
PCP (pentachlorophenol)			PCP free
Slip Test			NA
Fire Reaction			NA
Cigarette Burning			NA
Packaging information			
No. of Pieces Per Pack			According to the order requirement base on linear meter or maximum 10 pieces
Carton Box			6 sided single face corrugated carton
Packs Cover			Plastic strap and PPE shrink film
Labelling			All packs are labelled at both end with information on product name, sizes, m ² /ft ² per pack, pieces, packs weight and M.R.P. price

UNDERLAY **VAPROTECT®**



Mikasa **VAPROTECT®** - a perfect combination of PE Film and extruded foam which acts as moisture and sound barrier, and an intermediate layer.

Product	Length	Width	Thickness
Va protect	15000mm	1000mm	2mm
Running Metre/Roll	15		

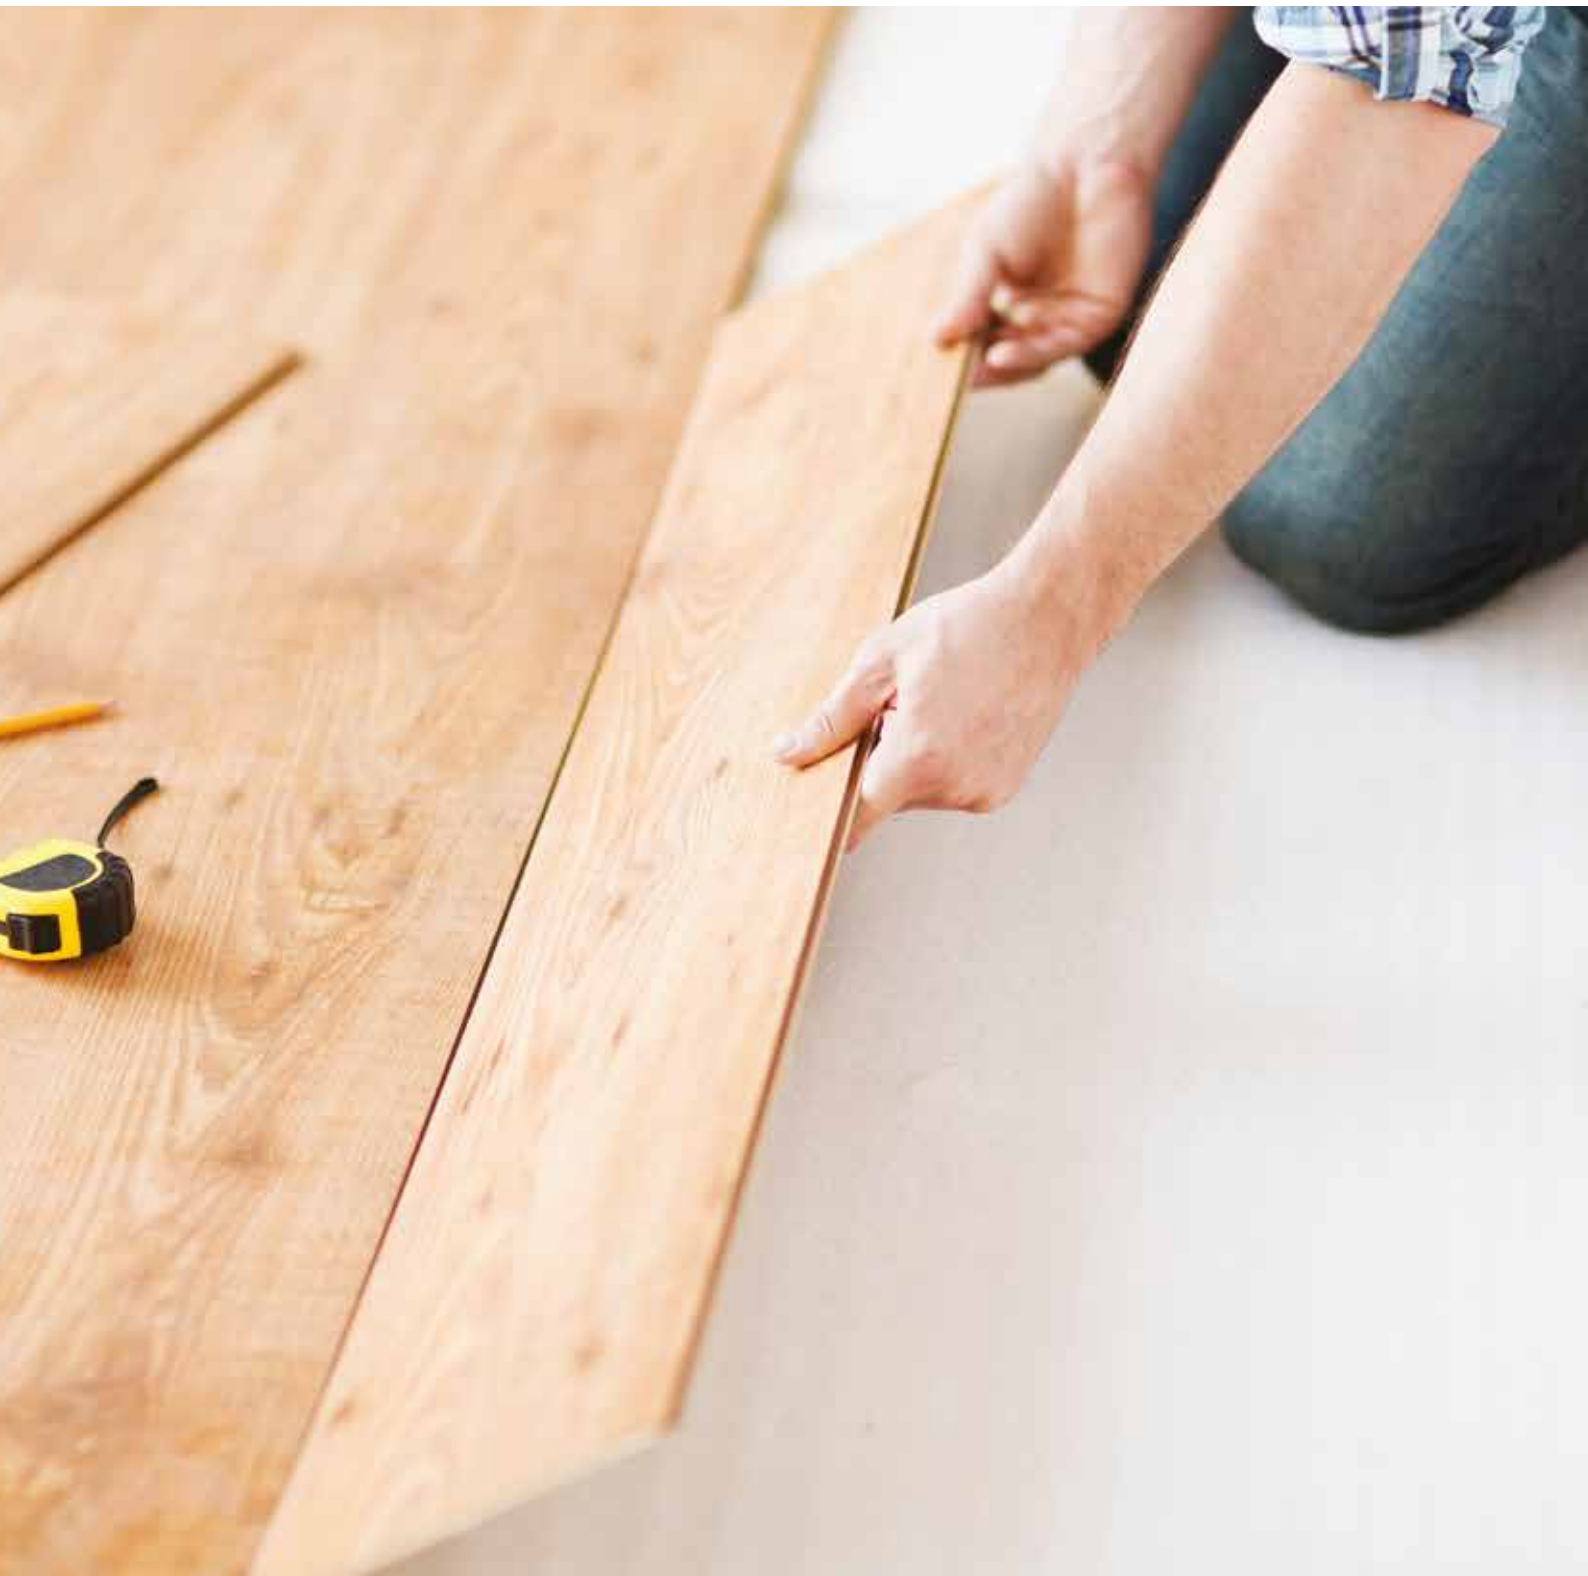



www.mikasafloors.com

Made by



Greenlam Industries Limited, 2nd Floor, West Wing, Workmark-1,
Aerocity, IGI Airport Hospitality District, New Delhi – 110037.

For a real experience with real wood, scan the QR code or **SMS <MIKASA> to 53030** to download the Mikasa brochure.
To know more, call on **Toll Free No.: 1800-833-0004** | www.mikasafloors.com | info@mikasafloors.com

To Download The Mikasa App



The best way to recycle this brochure is to give it to someone who needs it