




MIKASA RANGE RECKONER



G R O W
U P T O
W O O D

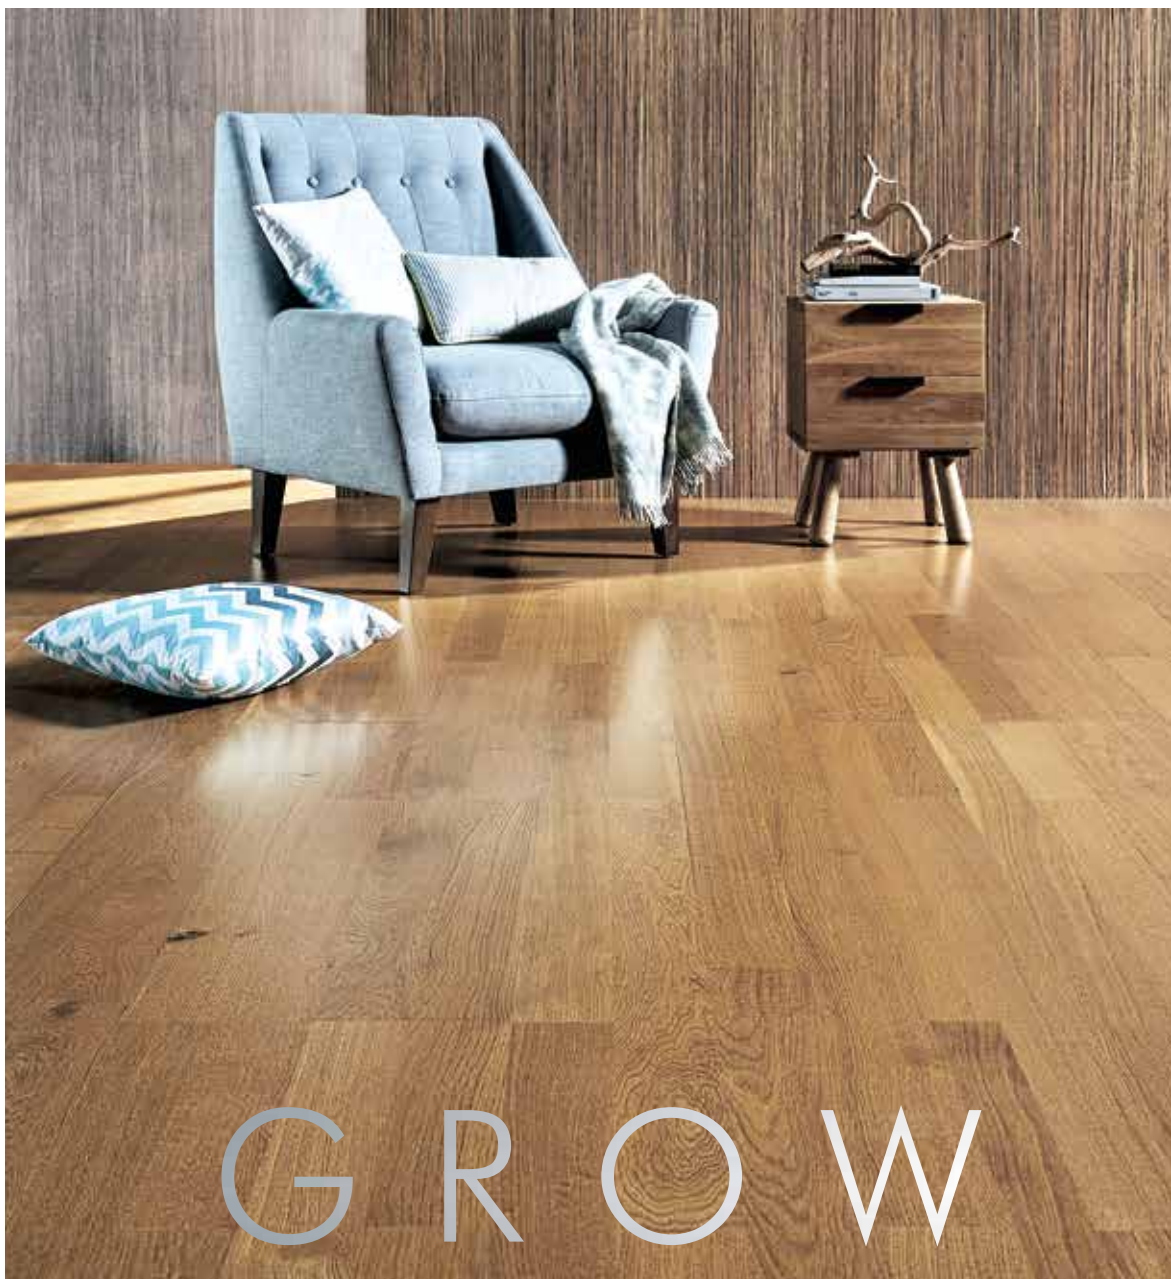


WEAVING MAGIC INTO YOUR CREATIONS

Greenlam Industries has been a hallmark of exceptional artistry and innovation. It is India's No. 1, Asia's largest and among the top 3 brands in the world offering surfacing solutions spread across laminates, compacts, veneers, engineered wooden floors and doors. With the presence in more than 100 countries, Greenlam is carrying its innovation and artistry forward, with Mikasa Real Wood Floors.

Made for the first time in India, Mikasa is the only manufacturer of real wood floors in the country. With more than 100 unique products in an expansive portfolio, Mikasa showcases the largest selection of engineered wood flooring. Each piece of wood, naturally beautiful, is further enhanced using the latest European technology and expert craftsmanship, thus bringing out the true character of wood. Our wide-ranging collection brings together the most exotic species of wood from around the world, to accentuate every space. We create the finest floors for those who have the finest taste.

EXCELLENCE IN EVERY LAYER

Mikasa floors consist of three layers composed of Real Hard Wood, Stabilizing Core and Balancing Layer. Put together using the most modern technology, this construction provides solidity and stability to every plank while restricting the expansion and contraction of wood and giving your floor the resilience to stand the test of time and climate.

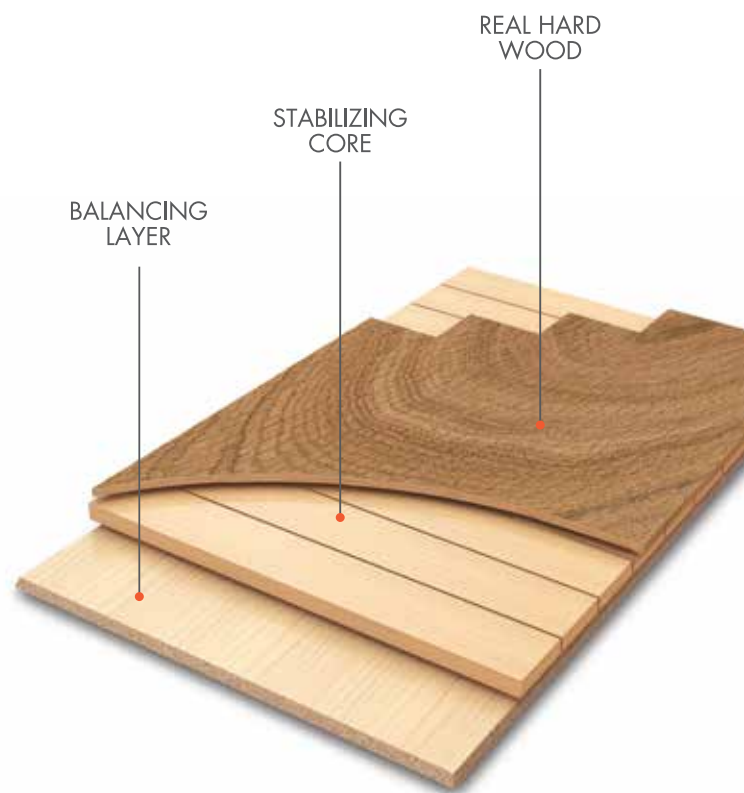

PlankLOC™

The Bond That Lasts Forever

A revolutionary technology that locks two planks together without using glue, ensuring that the joints that bind the two planks never open up. PlankLOC™ allows for ease of installation, giving a seamless look to your floor that withstands the effects of seasonal change and foot traffic.





ACCESSORIES


THE FINAL TOUCH TO YOUR MIKASA FLOOR. No floor is complete without matching accessories to cover the edge or to transit between other floors. Mikasa presents an array of matching underlays, skirting and profiles to complement your floor.




Beading and Quadrant




Veneered Skirting




Reducer Mouldings



T-Mouldings



End Mouldings



Stair Noses



Underlay VAPROTECT®



Featured floor: Oak Moss

GREAT REASONS FOR CHOOSING MIKASA

1. Wood. As natural as it can get. Mikasa is nothing but real wood.
2. Spoilt for choice. The largest variety of decors to choose from.
3. Engineered to provide stability in any climatic condition.
4. Mikasa floors are very easy to install, remove and reinstall.
5. Being pre-lacquered, they have a strong surface which lasts for years.
6. Fully supported by warranties of up to 30 years.
7. Made in India. With the largest network of sales and service outlets you are never far from Mikasa.





PRISTINE

15mm



A	B	C	D	E	

CITY Oak Stockholm



B	C	D	E		

CITY Oak London



A	B	C	D	E	

CITY Oak Berlin



H					

CITY Oak Munchen



I					

CITY Oak Nice



B	C	D	E		

PALACE Oak Radiant



B	C	D	E		

PALACE Oak Earth



B	C	D	E		

PALACE Oak Noir



B	C	D	E		

PALACE Oak Moonlight



B	C	D	E		

PALACE Oak Winter




B	C	D	E		

PALACE Oak Dusk




B	C	D	E		

PALACE Oak Spring



PALACE Oak Summer



PALACE Oak Lumen



PALACE Oak Sea Mist



ESTATE Oak Topaz



ESTATE Oak Stein




ESTATE Oak Slate




ESTATE Oak Dune



ESTATE Oak Amber



FUMOIR Oak Smokehouse



FUMOIR Oak Fume




FUMOIR Oak Moss



VERMONT Noce Grande



VERMONT Noce Imperial



VERMONT Noce Medio



VERMONT Noce Piccolo



VERMONT Noce Rosso



VERMONT Noce Coral



VERMONT Noce Lila

QUICK REFERENCE GUIDE



Stained



Brushed



Matt Lacquer



Satin Lacquer



Smoked



Bevelled Edge




Micro-
Bevelled Edge



Square Edge

ATMOS


10mm




EICHE Oak Naturalé



EICHE Oak Nature



EICHE Oak Crème



EICHE Oak Espresso



EICHE Oak Cappuccino



Featured floor: Oak Naturalé

	PRISTINE	ARBOR	ATMOS
TECHNICAL INFORMATION			
Thickness (mm)	15	13	10
Veneer Thickness (mm)	Up to 3.0	Up to 0.6	Up to 0.6
Plank Dimensions (mm)	Width: 135 - 210 Length: 1800 - 2420	Width: 152 Length: 1200	Width: 120 Length: 1200
Configuration	1, 2 & 3 Strips	1 Strip	1 Strip
Wood Species	Oak and Walnut	Oak, Walnut, Teak, Ash and other exotic species	Oak
No. of Planks/Pack	06 Planks	06 Planks	08 Planks
Sq.Mtrs/Pack	1.46 m ² - 2.83 m ²	1.09 m ²	1.15 m ²
Weight/Pack (Kg)	12.80 - 23.40	10.80	9.85
Joint	PlankLoc™, Glueless		
Core Material	Pine	High Density Fiber Board	High Density Fiber Board
Finish	Brushed, Matt and Satin		
Warranty	30 Years in a residential environment. Check for Warranty in commercial applications.	10 Years in a residential environment. Check for Warranty in commercial applications.	10 Years in a residential environment. Check for Warranty in commercial applications.

PRODUCT CHARACTERISTICS		
Construction	Boards are constructed in 3 layers in order to minimize expansion and contraction within the floorboard. The direction of the fibers within each layer is oriented at right angles to the adjacent layer.	
Design	1, 2 & 3 strip plank with/without bevelled edges. MIKASA PlankLoc™ glueless joint on all edges. Surface layer consists of sliced strips of hardwood and a backing of pine/spruce veneer.	1-strip plank, with/without bevelled edge, MIKASA PlankLoc™ glueless joint on all edges. Surface layer consists of sliced or rotary cut strips of hardwood and a backing of pine/spruce veneer.
Top Layer	The top layer is made of select hardwood and is up to 3.0 mm in thickness. This allows resanding and refinishing atleast twice. Detailed information about maintenance is included in our Maintenance & Repair Guide. Download it from our website www.mikasa floors.com	The top layer is made of hardwood and is up to 0.6 mm in thickness. This does not allow any resanding and refinishing. The surface is pre-finished with several layers of UV hardened acrylic lacquer, free from formaldehyde and solvents.
Surface Finish	The surface is pre-finished with several layers of UV hardened acrylic lacquer, free from formaldehyde and solvents.	
Moisture Content	Average moisture content at delivery is approximately 7-9%.	
Insects	The boards are delivered free of insects, woodworms etc. This is secured by the process temperatures.	
Formaldehyde Emission	The boards comply more than adequately with the stringent EU E1 norms for formaldehyde emissions.	
Fire Classifications	Wooden floors fulfill the requirements for class G, the highest fire classification for floors as per Swedish Building Code, BBR 94.	
Reduction of sound weighted index 'footfall' to the room below. NF EN ISO 140-8/ Acc.to NF EN ISO 717-2, ΔLw in dB with 3mm foam	17dB	
Installation	Floating/Glued down	
Chemical and Stains	Resists most household stains up to 24 hours.	
Colour Change	Wood is a natural product and changes colour with time when exposed to light.	
Underfloor Heating Compatibility	—	Suitable for room temperature (max temperature 27°C), waterborne system or self-regulating electrical system.
Subfloor Requirement	The Subfloor must be dry, clean, level and solid. The requirements in HusAMA98, Table 43.DC/-1 and MDB.3 apply. Also note our Subfloor Requirements. You can download more details on Subfloor Requirements and Underfloor Heating from our website www.mikasa floors.com	



Greenlam Industries Limited 1501 - 05, Narain Manzil, 23, Barakhamba Road, New Delhi 110001, India. T : +91-11-42791399

For a real experience with real wood, **SMS <MIKASA> to 53030** or call on **Toll Free No.: 1800-833-0004**

www.mikasa floors.com | info@mikasa floors.com | [f](#) | [t](#) | [g+](#)



We acknowledge that wood is precious and thereby all Mikasa floors use only ethically sourced wood without disturbing the natural balance of our beautiful ecosystem.

The best way to recycle this brochure is to give it to someone who needs it.